

## forte™ SOLGEL-WAX

The world's highest temperature wax capillary column at 300°C

- Low Bleed
- Robust
- Inert

A unique, highly inert phase.

I.D. (mm)	Length (meter)	Film Thickness (µm)	Temperature Limits (°C)	Part Number	Price
0.25	30	0.25	30 to 280/300	054796	
	30	1.00	30 to 280/300	054787	
0.32	60	0.25	30 to 280/300	054791	
	30	0.25	30 to 280/300	054788	
	30	0.50	30 to 280/300	054797	
	60	0.25	30 to 280/300	054789	
0.53	60	0.50	30 to 280/300	054792	
	30	0.50	30 to 280/300	054786	
	30	1.00	30 to 280/300	054785	

## forte™ BPX608

### 35% Phenyl Polysilphenylene-siloxane


Ideal for the analysis of organochlorine herbicides and pesticides. Suitable replacement for: DB-608, HP-35, Rtx-35, SPB-608, ZB-35.

I.D. (mm)	Length (meter)	Film Thickness (µm)	Temperature Limits (°C)	Part Number	Price
0.32	25	0.40	0 to 360/370	054823	

## forte™ BPX5

### 5% Phenyl Polysilphenylene-siloxane

An MS-Premium, low bleed column with a maximum temperature up to 370°C. Suitable for trace analysis of pesticides, drugs, hydrocarbons and phenols. The BPX5 phase has been designed for robustness and is suitable for over 80% of all routine analyses performed by chromatographers.

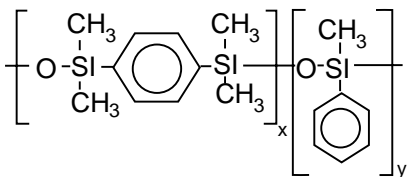

#### Similar Phases

CP-Sil 8CB, DB-5, DB-5.625 XTI-5, DB-5MS, HP-5, HP-5MS, HP5-TA, MDN-5S, Rtx-5ms, SPB-5, Ultra-2.

#### Applications

Ultra trace analysis, pesticides/herbicides, hydrocarbons, solvents, phenols, amines, GC/MS and other specific detector applications.

#### Temperature Range Isothermal/temperature programmed

0.25µm - 1.0µm film: -40°C to 360°C/370°C  
>1.0µm film: -40°C to 350°C/360°C

I.D. (mm)	Length (meter)	Film Thickness (µm)	Part Number	Price
0.10	10	0.10	054099	
0.15	10	1.20	054106	
	12	0.25	054103	
	12	0.40	054107	
	25	0.25	054104	
	25	0.40	054108	
	30	0.15	054110	
	50	0.25	054105	
	40	0.18	054229*	
0.22	12	0.25	054112	
	25	0.25	054113	
	25	1.00	054116	
	30	0.25	054142	
	50	0.25	054114	
	50	1.00	054117	
0.25	15	0.25	054100	
	15	1.00	054121	
	30	0.25	054101	
	30	0.50	0541025	
	30	1.00	054122	
	60	0.25	054102	
	60	1.00	054123	
	0.32	6	1.00	0541261
12		0.25	054118	
12		0.50	054124	
12		1.00	054127	
15		0.25	054144	
15		1.00	054152	

I.D. (mm)	Length (meter)	Film Thickness (µm)	Part Number	Price
0.32	25	0.25	054119	
	25	0.50	054125	
	25	1.00	054128	
	25	3.00	054136	
	30	0.25	054145	
	30	0.50	0541205	
	30	1.00	054153	
	50	0.25	054120	
	50	0.50	054126	
	50	1.00	054129	
	60	0.25	054146	
	60	1.00	054154	
0.53	12	0.25	054133	
	12	1.00	054130	
	12	3.00	054138	
	15	0.50	0541344	
	15	1.00	054147	
	15	1.50	0541347	
	15	3.00	054159	
	25	0.25	054134	
	25	1.00	054131	
	25	3.00	054139	
	30	0.50	0541345	
	30	1.00	054148	
	30	1.50	0541348	
	30	3.00	054160	
	50	1.00	054132	
	60	1.00	054158	