


Quick Acting Toggle Valves

Features

- Quick opening or closing
- Rugged compact design
- Variety of materials and sizes
- Straight, angle and cross patterns
- Gaugeable Swagelok® Tube Fitting, male and female NPT ends in any combination

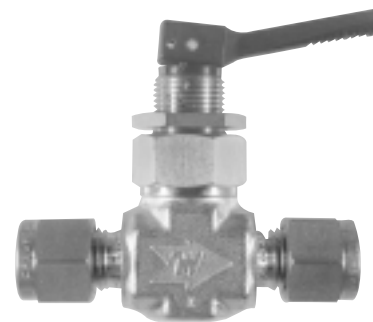

These Whitey® quick acting toggle valves provide for a positive shut off of gases at pressures up to 200 psi. A Viton O'Ring provides for a positive 'soft' seal. The handle locks in the 'open' or 'closed' position. Usable temperature range -29°C to 100°C.

| *Part No. | Description of Fittings | *Brass (B-) Price | *S/steel (S-) Price |
|-----------|-------------------------|-------------------|---------------------|
| -OGM2 | 1/8 Male NPT | B-OGM2 | S-OGM2 |
| -OGS2 | 1/8 Swagelok | B-OGS2 | S-OGS2 |
| -1GF2 | 1/8 Female NPT | B-1GF2 | S-1GF2 |
| -1GM4 | 1/4 Male NPT | B-1GM4 | S-1GM4 |
| -1GS4 | 1/4 Swagelok | B-1GS4 | S-1GS4 |
| -1GF4 | 1/4 Female NPT | B-1GF4 | S-1GF4 |

*For Brass add prefix B to Part No. *For S/Steel add prefix S to Part No.

Ball Valves

Special Features

- One quarter turn, fast acting operation
- Large orifice and straight through flow for minimum pressure drop
- Temperatures from -10°F to 400°F (-23°C to 204°C)
- Pressures to 3000 PSI (20,600 kPa)
- Extremely low torque operation
- Throttling capability
- Compact, attractive appearance
- TFE coated plugs are color coded to prevent mixing of materials
- Long cycle life
- Moderate vacuum service
- Positive shut-off; no leaks to atmosphere
- High reliability due to simple design
- Pressure balanced seals for safety
- Ease of maintenance-plug replacement subassembly minimizes system downtime
- One piece body construction provides safety
- 100% factory tested
- Available with Swagelok Tube Fitting, male and female pipe end connections in brass and 316 stainless steel



Nupro Plug Valves provide the ultimate design simplicity in a compact quick-acting, high capacity valve. One quarter turn of the handle actuates the valve from fully open to fully closed. Flow throttling is possible in interim positions. In addition, Nupro Plug Valves cover a wide pressure and temperature range.

| *Part No. | Description, end fittings | *Brass (B-) Price | *S/steel (S-) Price |
|-----------|---------------------------|-------------------|---------------------|
| -2P4T | 1/8 Swagelok | B-2P4T | S-2P4T |
| -2P4T2 | 1/8 Male NPT | B-2P4T2 | S-2P4T2 |
| -4P4T | 1/4 Swagelok | B-4P4T | S-4P4T |
| -4P4T2 | 1/4 Male NPT | B-4P4T2 | S-4P4T2 |

*For Brass add prefix B to Part No. *For S/Steel add prefix S to Part No.